

- 96 dB SPL 1W/ 1m average sensitivity
- 100 mm (4 in) Interleaved Sandwich Voice coil (ISV)
- 1000 WAES power handling
- Double Silicon Spider (DSS) for improved excursion control and linearity
- Improved heat dissipation via unique basket design

The 15LW1500 is a low frequency loudspeaker which sets a new industry standard in 15" (380 mm) high performance transducers, achieving a remarkable 34 Hz downwards extension with 96 dB average sensitivity and handling peak power levels of 7000 W.

The 15LW1500 has been designed for use as a low bass or subwoofer component in either highly compact reflex, bandpass or horn loaded configurations. It provides clean, linear frequency reproduction at high power levels, as part of a compact high power fullrange system. In its reflex configuration, it can be used in extremely compact enclosures (75 lt) making it also suitable for portable applications, such as, road shows and bass musical instruments.

The low noise and high excursion capabilities of the double-action roll surround and suspension system, in conjunction with the Eighteen Sound Double Silicon Spider (DSS), enable the 15LW1500 to achieve very high levels of linear travel for a 15" unit.



The already low distortion and unmistakable sound quality of this loudspeaker is further improved using Double Demodulating Rings (DDR), designed to dramatically reduce the intermodulation and harmonic distortion while improving the transient response.

The 100mm copper voice coil employs the Interleaved Sandwich Voice coil (ISV) technology, in which a high strength fibreglas former carries windings on both the outer and inner surfaces to achieve a balanced coil with a uniform distribution of mass and motive energy that results in an extremely linear motor assembly.

The carbon fiber reinforced straight ribbed cone assures smooth response and exceptional strength with maximum reliability under high mechanical stress.

Excellent heat dissipation has been achieved by incorporating air channels between the basket and top plate of the magnet. Further ventilation is provided using air vents in the back plate to direct air into the lower part of the voice coil gap.

Due to the increase in use of high power audio systems at outdoor events or in marine environments, the ability to perform properly under inclement weather conditions is a key feature in the Eighteen Sound philosophy. This has been achieved thanks to an exclusive cone treatment improving pulp strength which gives water repellent properties to both sides of the cone. In addition, a special treatment is applied to the top and back plates which is far more resistant to the corrosive effects of salts and oxidization than any other treatment in use today.

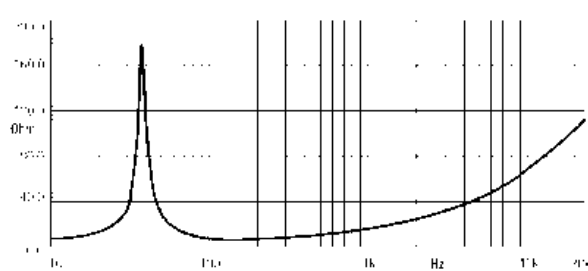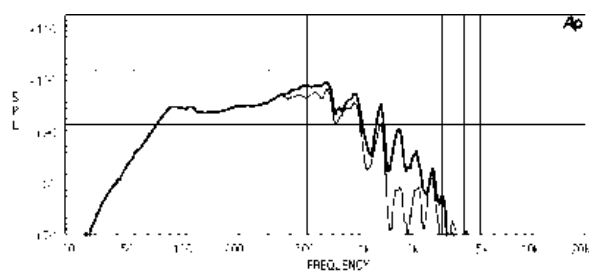



# 15LW1500 8Ω

LF drivers - 15.0 Inches

## SPECIFICATIONS

Nominal Diameter	380 mm ( in)
Nominal Impedance	8 Ω
Minimum Impedance	5.5 Ω
Nominal Power Handling <sup>1</sup>	1000 W
Continuous Power Handling <sup>2</sup>	1400 W
Sensitivity <sup>3</sup>	96.0 dB
Frequency Range	40 - 2000 Hz
Voice Coil Diameter	100 mm (4.0 in)
Winding Material	copper

## PARAMETERS<sup>4</sup>

Resonance Frequency	34 Hz
Re	5.0 Ω
Qes	0.29
Qms	11.5
Qts	0.28
Vas	195.0 dm <sup>3</sup> (6.89 ft <sup>3</sup> )
Sd	850.0 cm <sup>2</sup> (131.75 in <sup>2</sup> )
Xmax	9.0 mm
Mms	130.0 g
Bl	22.1 Txm
Le	2.4 mH
EBP	117 Hz

## DESIGN

Surround Shape	Single roll - Rubber
Cone Shape	Straight
Magnet Material	Ferrite
Woofers Cone Treatment	Weather protected

## MOUNTING AND SHIPPING INFO

Overall Diameter	387 mm (15.24 in)
Bolt Circle Diameter	370 mm (14.57 in)
Baffle Cutout Diameter	353.0 mm (13.9 in)
Depth	165 mm (6.5 in)
Flange and Gasket Thickness	24 mm (0.94 in)
Net Weight	12.4 kg (27.34 lb)
Shipping Weight	13.4 kg (29.54 lb)
Shipping Box	405 x 405 x 214 mm (15,94 x 15,94 x 8,43 in) mm ( in)

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.